



ELEVATOR TRACTION MACHINE

エレベーター巻上機

SGX-P

エレ速度 (m/min)	積載 荷重 (kg)	モータスペック					メインシーブ		ローピング
		出力 (kw)	回転数 (rpm)	極数 (P)	電流値 (A)	周波数 (Hz)	シーブ径	ロープ径 ×本数	
45	450	2.1	71.6	20	10.0	11.9	Φ400	Φ10×3,4,5	2:1
60		2.8	95.5		12.0	15.9			
90		4.1	143.2		17.0	23.9			
105		4.8	167.1		20.0	27.9			
45	600	2.8	71.6		13.0	11.9			
60		3.7	95.5		16.0	15.9			
90		5.5	143.2		23.0	23.9			
105		6.4	167.1		27.0	27.9			
45	750	3.4	71.6		16.0	11.9			
60		4.6	95.5		20.0	15.9			
90		6.9	143.2		29.0	23.9			
105		8.0	167.1		33.5	27.9			
45	900	4.1	71.6		19.0	11.9			
60		5.5	95.5		24.0	15.9			
90		8.3	143.2		34.5	23.9			
105		9.6	167.1		40.0	27.9			
45	1000	4.6	71.6	21.0	11.9				
60		6.1	95.5	27.0	15.9				
90		9.2	143.2	38.5	23.9				
105		10.7	167.1	43.5	27.9				
モータ入力電源		AC200V(3相)					ブレーキ		703×2
ブレーキコイル電圧		DC110V					制動トルク(N.m)		
最大軸荷重(kg)		3200					巻上機総重量(kg)		316
							巻上機重量(kg)		264

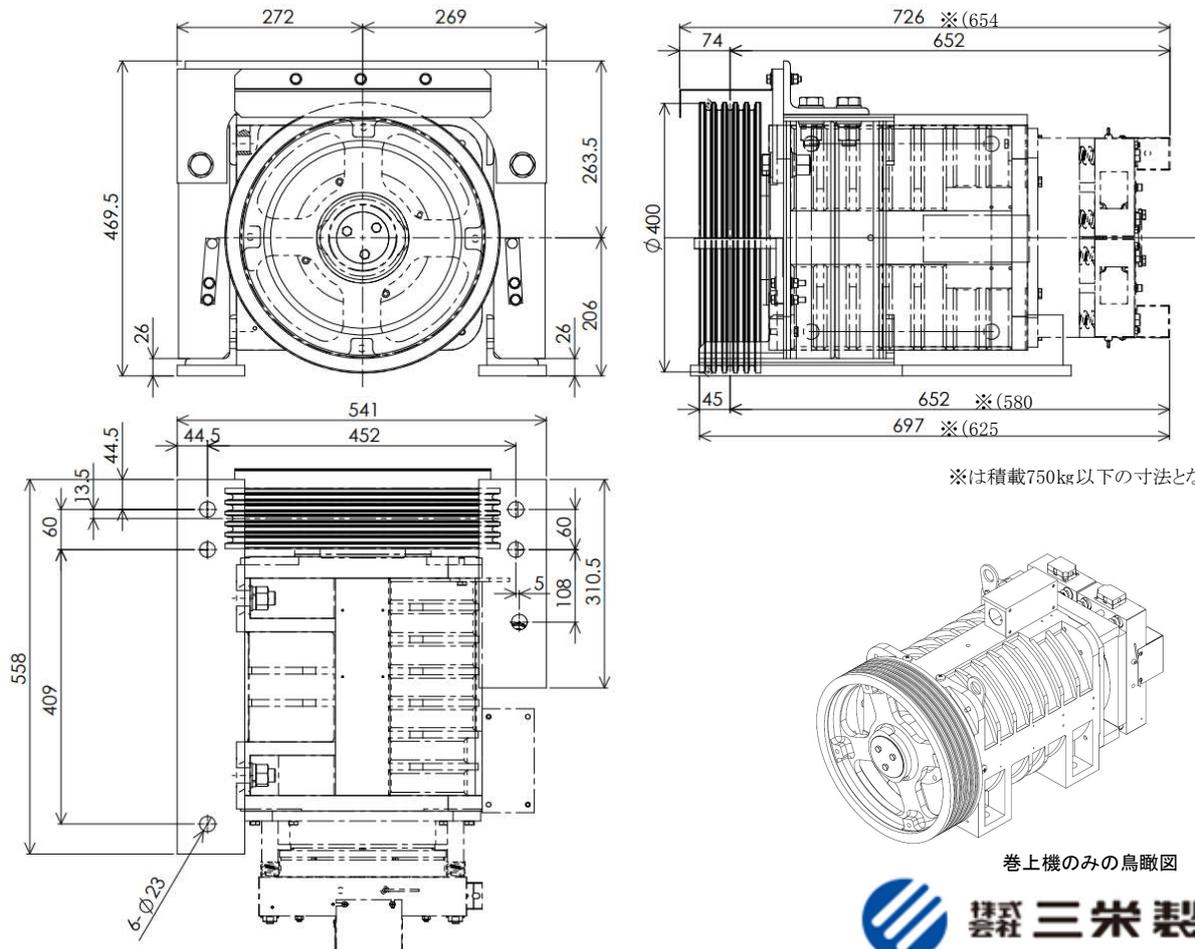

A part of specification and dimension is subject to change without notification in dvance.
仕様寸法は変更することがありますので、ご使用の際はご照会下さい。